


# IP Camera

**H.265 (3MP)**

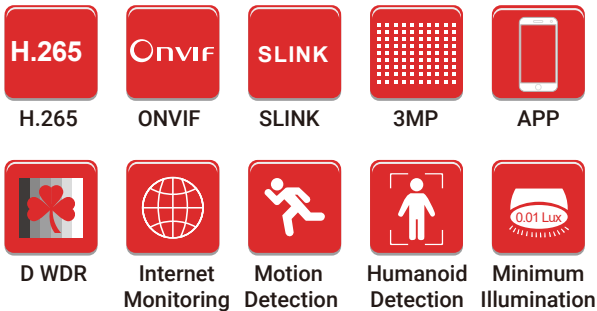

## FUNCTION FEATURES

- Built-in humanoid and motion detection algorithm.
  - Detection frame 20fps, detect <5 people at the same time.
  - Support low bit rate and low latency.
  - H.265 compression format, save bandwidth and storage space.
  - IP67 Rating.
  - Support Smart IR to avoid Infrared over-exposure at night.
  - Support ICR auto switch, realize D&N surveillance.
  - Support 3D DNR and D WDR.
  - Support HTTPS transmission with password.
  - Support ONVIF, SLINK, email, NTP service.
- Change the password when the initial device is started to ensure the password security.
- Support mobile remote surveillance(Android, iOS).

## SPECIFICATIONS

Camera	
Model No	AE-IPPR03B
DSP	Hi3516EV200
Image Sensor	1/2.9" GC2053
Lens	3.6mm
IR Lights	4 Array IR light, distance 20M
D-WDR	D-WDR (off / low / middle / high)
IR Led Control	Auto / Manual / Off
3D DNR	Off / Low / Middle / High / Higher
Defog	Off / Low / Middle / High
Mirror	Off / Horizontal Mirror / Vertical Mirror / 180 degree flip
Image Setting	Brightness, Contrast, Sharpness, Saturation, Chroma
Humanoid Detection	
Detection Quantity	≤5 people
Humanoid Size	Humanoid pixel≥40X40
Detection Ratio	≥99%(meet above requirement)
Capture Corresponding Speed	≤1s
Max Detection Frame	20fps/s
Fault Detection Ratio	≤2%
Detection Part	People with any posture including half body, head, hand, shoulder
People Tracking	Support
Detection Mode	Support static and dynamic humanoid detection
Detection Method	Support visible light image detection, and near infrared image detection
Detection Area	Appointed area, default full-screen
Upload Method	Upload it under private protocol
Trigger Method	Video trigger
Audio & Video Encoding	
Video Encode Standard	H.265
Encoding Feature	Main stream: 3MP 2048x1536@20fps, 2MP 1920x1080@25fps
Detection Method	Sub stream: D1(720x576), VGA(640x360)
Video Code Rate	Fixed code rate,variable code rate(Main stream code:160Kbps-4000kbps)
Video Type	Composited stream / video stream
Audio Standard	G.711A / G.711U
Network Function	
Protocol	TCP / IP, UDP, HTTP, HTTPS, DHCP, RTSP, DDNS, NTP, PPPOE, UPNP, SMTP
Connection Protocol	ONVIF / GB28181(optional)
Security Mode	Authorized user name and password, HTTPS with password, AES connecting with password, RTSP verification
Motion Detection	Set detection area, can set multi-level sensitivity
Privacy Mask Alarm	Support 1 area setting
Privacy Mask	Support 4 area privacy mask
Schedule Linkage	Capture, email
Equipment Anomaly Inspection	Support network disconnection, IP conflict, illegal access alarm
Character Overlay (OSD)	Title,time and date overlay, multi-line OSD, OSD color is optional
Port	
Network Port	Rj45 10M / 100M network self-adaptive
Audio	Audio optional
General	
Power Supply	DC12V / PoE optional
Size	170.8(L)*67(W)*67.4(H)mm
Working Temperature	-10°C ~ 50°C
Working Humidity	0%~90%
IP Rating	IP67 Rating